


# Fiber Tap HD8 Implementation

1 The high-density Tap provides a permanent, in-line access port to monitor all full-duplex traffic on up to eight links without data stream interference.

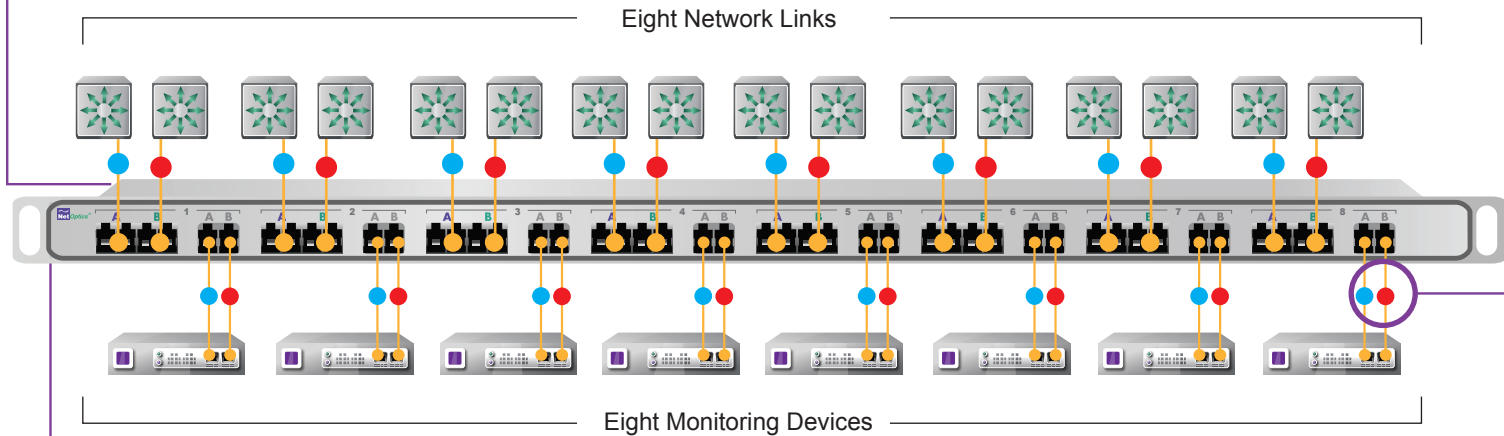

2 The network signal is split so that the monitoring devices have full access to the signal.

3 The monitoring devices see the same traffic as if it were also in-line, including physical layer errors.